

**RS750FZ3I**  
**75 cm, FREEZER, 0FZ Model**  
**BUILT-IN**  
**DESIGNER® SERIES**



**Fhiaba**



**FEATURES**

- Made in Italy
- OptiView™: OptiView LED lights
- EventLift™: Easily rearrange the shelving without removal using the EvenLift system
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Antibacterial Stainless Steel Interiors Drawers: Achieve the highest food quality by storing food in the stainless steel interior drawer that shields against the spread of bacteria
- Total No Frost: Temperature control helping mitigate cooling loss when opening the refrigerator door. No more frost build-up that requires defrosting
- Ice Maker: Get high-quality ice cubes in a variety of sizes
- Water Filter: Get pure water and crystal-clear ice thanks to the integrated water filter and ice maker
- SuperIce™: Temporarily increase ice cube production for gatherings and parties
- Ice Size: Easily switch between medium and large ice cubes
- EquiLance™: Achieve a seamless built-in look with Fhiaba's innovative door hinge
- Stainless steel front

**GENERAL PROPERTIES**

|                                         |                              |
|-----------------------------------------|------------------------------|
| Equilance Hinge                         | YES                          |
| Soft-Closing Glides                     | YES                          |
| Low Vibration                           | YES                          |
| OptiView (Led Light Spots)              | YES                          |
| Shelves                                 | 3 - 1 fixed and 2 adjustable |
| Type Of Shelves                         | glass                        |
| Door Bins                               | 2                            |
| Fridge Interior Drawers                 |                              |
| Freezer Drawers                         | 4                            |
| Evenlift Shelves                        | YES                          |
| Full Extension Shelves 90° Door Opening | NO                           |
| Full Extension Drawers 90° Door Opening | YES                          |
| Defrost Process                         | AUTOMATIC                    |
| Ice Maker With Water Filter             | YES                          |
| Door Open Alarms                        | YES                          |
| Shopping Fridge                         | NO                           |
| Shopping Freezer                        | YES                          |
| Power Failure Alert                     | YES                          |
| Water Dispenser With Water Filter       | NO                           |

# RS750FZ3I



## 75 cm, FREEZER, 0FZ Model

### BUILT-IN

#### DESIGNER® SERIES

## PRODUCT DETAIL

# Fhiaba

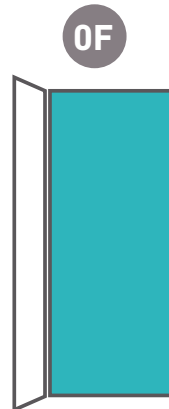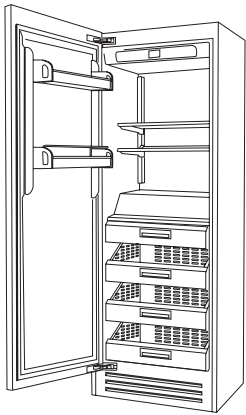

1D | 1M

freezer

D = door


M = separate microclimates

| CAPACITY                                              |                               |
|-------------------------------------------------------|-------------------------------|
| Volume Compartment 1 (L)                              | N/A                           |
| Volume Compartment 2 (L)                              | N/A                           |
| Volume Compartment 3 (L)                              | 452                           |
| Total Net Volume (L)                                  | 452                           |
| Total Gross Volume (L)                                | 455                           |
| Compartment 1 / Upper wine cellar capacity (bottles)  | N/A                           |
| Compartment 2 / Lower wine cellar capacity (bottles)  | N/A                           |
| Compartment 3 / Bottom wine cellar capacity (bottles) | N/A                           |
| TECHNICAL DETAILS                                     |                               |
| Total absorbed current (A)                            | 1.5                           |
| Voltage (V)                                           | 220-240V                      |
| Frequency (Hz)                                        | 50/60 Hz                      |
| Power Cord Length (mm)                                | 2                             |
| Plug Type                                             | Tipo F (Schuko) 16A IEC13 10A |
| Climatic class                                        | SN/T                          |
| Noise level (dB)                                      | 41                            |
| Refrigerant (gas)                                     | R600a                         |
| Water connection / female attachment                  | female 3/4"                   |
| EFFICIENCY                                            |                               |
| New Energy Label class                                | E                             |
| Energy consumption (kWh/year)                         | 318                           |


| DIMENSIONS & WEIGHT                                                                                                                                                                                                                                                                                                                                                                                           |                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Height of the product (closed weels)(mm)                                                                                                                                                                                                                                                                                                                                                                      | 2120            |
| Adjustable feet height (mm)                                                                                                                                                                                                                                                                                                                                                                                   | 25              |
| Width of the product (mm)                                                                                                                                                                                                                                                                                                                                                                                     | 760             |
| Depth of Product without handle (mm)                                                                                                                                                                                                                                                                                                                                                                          | 620             |
| Wall cavity height (mm)                                                                                                                                                                                                                                                                                                                                                                                       | 2134            |
| Wall cavity width (mm)                                                                                                                                                                                                                                                                                                                                                                                        | 762             |
| Wall cavity depth (mm)                                                                                                                                                                                                                                                                                                                                                                                        | 630             |
| Net Weight (kg)                                                                                                                                                                                                                                                                                                                                                                                               | 167             |
| Gross Weight (kg)                                                                                                                                                                                                                                                                                                                                                                                             | 188             |
| TEMPERATURE RANGES                                                                                                                                                                                                                                                                                                                                                                                            |                 |
| Climatic compartments                                                                                                                                                                                                                                                                                                                                                                                         | 1               |
| Compartment 1 / Upper temperature (°C)                                                                                                                                                                                                                                                                                                                                                                        | from -15 to -22 |
| Compartment 2 / Middle temperature (°C)                                                                                                                                                                                                                                                                                                                                                                       | from N/A to N/A |
| Low temp zone                                                                                                                                                                                                                                                                                                                                                                                                 | NO              |
| Compartment 3 / Low temperature (°C)                                                                                                                                                                                                                                                                                                                                                                          | from N/A to N/A |
| Dual zone                                                                                                                                                                                                                                                                                                                                                                                                     | NO              |
| ACCESSORIES                                                                                                                                                                                                                                                                                                                                                                                                   |                 |
| <ul style="list-style-type: none"> <li>• Ice maker with water filter</li> <li>• Water filtration system</li> <li>• Joining kit</li> <li>• Stainless steel portal for freestanding</li> <li>• Extra lenght anti-tipping kit</li> <li>• Anticondensation kit</li> <li>• Cleaning kit</li> <li>• Water filter cartridge</li> <li>• Front ventilation kit</li> <li>• Painting</li> <li>• 90° Door stop</li> </ul> |                 |

RS750FZ3I
75 cm, FREEZER, 0FZ Model
BUILT-IN
DESIGNER® SERIES

PRODUCT SPECIFICATIONS AND DIMENSIONS

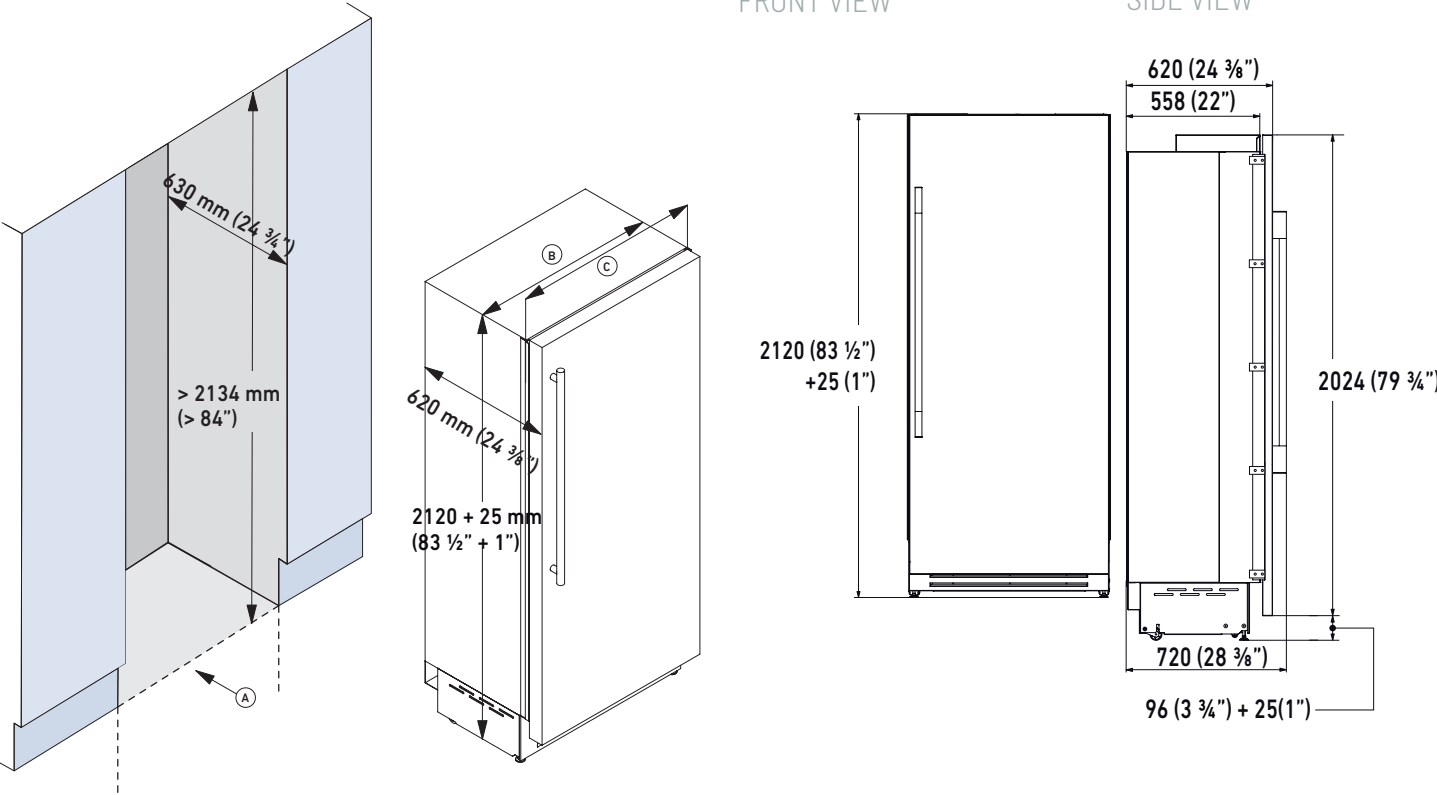

| TECHNICAL DATA                        |     |
|---------------------------------------|-----|
| Niche Width A (mm)                    | 762 |
| Unit Width B (mm)                     | 735 |
| Unit Width with lateral frames C (mm) | 760 |

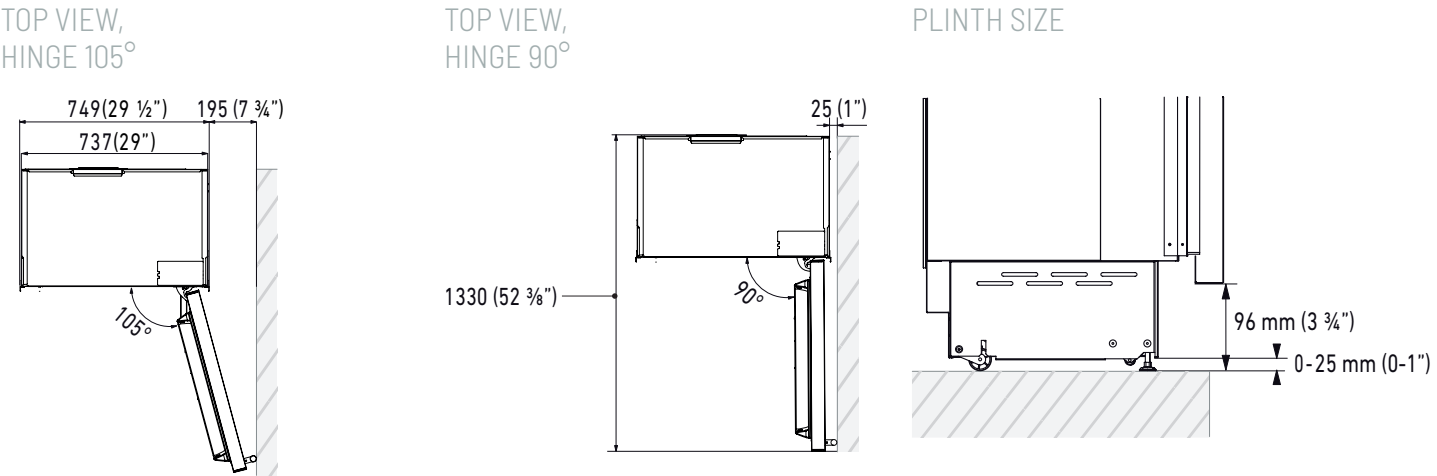

*i*

For installation specifications, please consult with Fhiaba.  
For optimum installation, we recommend using the actual product as the best guide.

*i*

Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

# RS750FZ3I


75 cm, FREEZER, 0FZ Model

BUILT-IN

DESIGNER® SERIES


## PRODUCT SPECIFICATIONS AND DIMENSIONS

### Electrical Connection

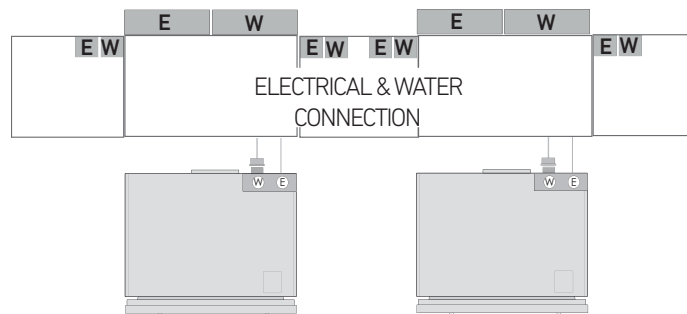

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

**IMPORTANT:** do not put the water shut-off valve behind the appliance where it will be inaccessible.

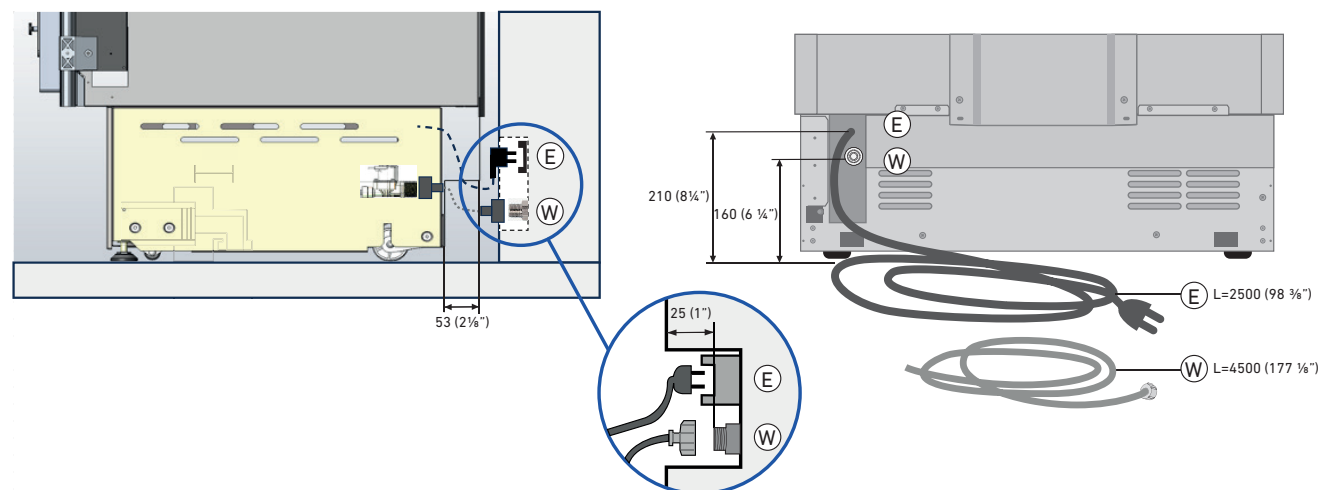

For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.