


S600FW3

60 cm, WINE CELLAR, OFW Model

BUILT-IN

INTEGRATED® SERIES

Fhiaba

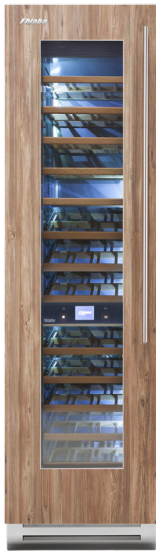

FEATURES

- Made in Italy: Designed and built entirely in Italy with artisanal precision
- Long Term Reliability: Premium materials and rigorous testing ensure consistent, durable performance
- Galvanized Steel Structure: Strength and stability engineered to last
- Antibacterial Interior: Hygienic surfaces preserving freshness and bottle quality
- ProVent™: Uniform cold air distribution across every zone
- EquiLance™: Patented variable pivot hinge for silent, stable movement
- OptiView™: Diffused and uniform LED lighting, elegant and with low heat emission to preserve the wine's properties
- Full Color TFT Display: Clear, intuitive, high definition interface
- Active Safety: Visual and acoustic alerts
- 100% Total No Frost: Automatic system that prevents ice formation and ensures impeccable humidity control
- Variable Speed Compressors: Precise temperature control and reduced vibrations
- Sabbath Mode: Dedicated function for observance needs
- Easy Installation: Adjustable feet and rear wheels
- Two Independent Climate Zones: Dedicated temperature and humidity control for red, white, and sparkling wines
- Triple-layer bronzed glass door: Total protection against UV rays and external temperature fluctuations
- Humidity control: Precise regulation to preserve corks, labels, and bottle integrity

GENERAL PROPERTIES

|                                         |           |
|-----------------------------------------|-----------|
| Equilance Hinge                         | YES       |
| Soft-Closing Glides                     | NO        |
| Low Vibration                           | YES       |
| OptiView (Led Light Spots)              | YES       |
| Shelves                                 | 13        |
| Type Of Shelves                         | WOOD      |
| Door Bins                               |           |
| Fridge Interior Drawers                 |           |
| Freezer Drawers                         | N/A       |
| Evenlift Shelves                        | NO        |
| Full Extension Shelves 90° Door Opening | YES       |
| Full Extension Drawers 90° Door Opening | NO        |
| Defrost Process                         | AUTOMATIC |
| Ice Maker With Water Filter             | NO        |
| Door Open Alarms                        | YES       |
| Shopping Fridge                         | NO        |
| Shopping Freezer                        | NO        |
| Power Failure Alert                     | YES       |
| Water Dispenser With Water Filter       | NO        |



# S600FW3

60 cm, WINE CELLAR, OFW Model

BUILT-IN

INTEGRATED® SERIES

## PRODUCT DETAIL

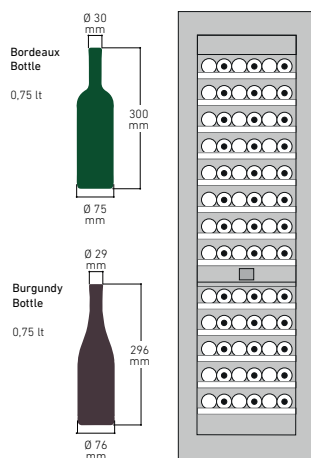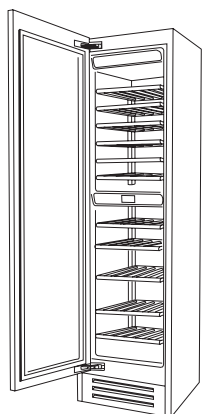

1D | 2M

wine cellar

D = door

M = separate microclimates

| CAPACITY                                              |                               | DIMENSIONS & WEIGHT                       |                            |
|-------------------------------------------------------|-------------------------------|-------------------------------------------|----------------------------|
| Volume Compartment 1 (L)                              | 352                           | Height of the product (closed weels)(mm)  | 2120                       |
| Volume Compartment 2 (L)                              | N/A                           | Adjustable feet height (mm)               | 25                         |
| Volume Compartment 3 (L)                              | N/A                           | Width of the product (mm)                 | 599                        |
| Total Net Volume (L)                                  | 352                           | Depth of Product without handle (mm)      | 610                        |
| Total Gross Volume (L)                                | 364                           | Wall cavity height (mm)                   | 2134                       |
| Compartment 1 / Upper wine cellar capacity (bottles)  | 48                            | Wall cavity width (mm)                    | 600                        |
| Compartment 2 / Lower wine cellar capacity (bottles)  | 30                            | Wall cavity depth (mm)                    | 650                        |
| Compartment 3 / Bottom wine cellar capacity (bottles) | N/A                           | Net Weight (kg)                           | 133                        |
|                                                       |                               | Gross Weight (kg)                         | 153                        |
| TECHNICAL DETAILS                                     |                               | TEMPERATURE RANGES                        |                            |
| Total absorbed current (A)                            | 1.5                           | Climatic compartments                     | 2                          |
| Voltage (V)                                           | 220-240V                      | Compartment 1 / Upper temperature (°C)    | from 4 to 18               |
| Frequency (Hz)                                        | 50/60 Hz                      | Compartment 2 / Middle temperature (°C)   | from N/A to N/A            |
| Power Cord Length (mm)                                | 2                             | Low temp zone                             | NO                         |
| Plug Type                                             | Tipo F (Schuko) 16A IEC13 10A | Compartment 3 / Low temperature (°C)      | from 4 to 18               |
| Climatic class                                        | SN/T                          | Dual zone                                 | NO                         |
| Noise level (dB)                                      | 38                            | ACCESSORIES                               |                            |
| Refrigerant (gas)                                     | R600a                         | • Stainless steel sides panels            | • Front ventilation kit    |
| Water connection / female attachment                  | /                             | • Glass door                              | • 90° Door stop            |
|                                                       |                               | • Joining kit                             | • Wine kit                 |
|                                                       |                               | • Stainless steel tubular handles Ø30mm   | • Cheese drawer            |
|                                                       |                               | • Stainless steel tubular handles Ø18mm   | • Set of knives            |
|                                                       |                               | • Stainless steel panels                  | • Prosciutteria kit        |
|                                                       |                               | • Stainless steel portal for freestanding | • Bottle trap              |
|                                                       |                               | • Extra length anti-tipping kit           | • Cigar drawer             |
|                                                       |                               | • Anti-condensation kit                   | • Beverage drawer          |
|                                                       |                               | • Cleaning kit                            | • Beverage shelf           |
|                                                       |                               | • Active carbon filter                    | • Beverage removable shelf |
|                                                       |                               | • FLD - Fhiaba Link Device                | • Chocolate kit            |
| EFFICIENCY                                            |                               |                                           |                            |
| New Energy Label class                                | G                             |                                           |                            |
| Energy consumption (kWh/year)                         | 143                           |                                           |                            |

# S600FW3


60 cm, WINE CELLAR, OFW Model

BUILT-IN


INTEGRATED® SERIES

## PRODUCT SPECIFICATIONS AND DIMENSIONS


**Fhiaba**

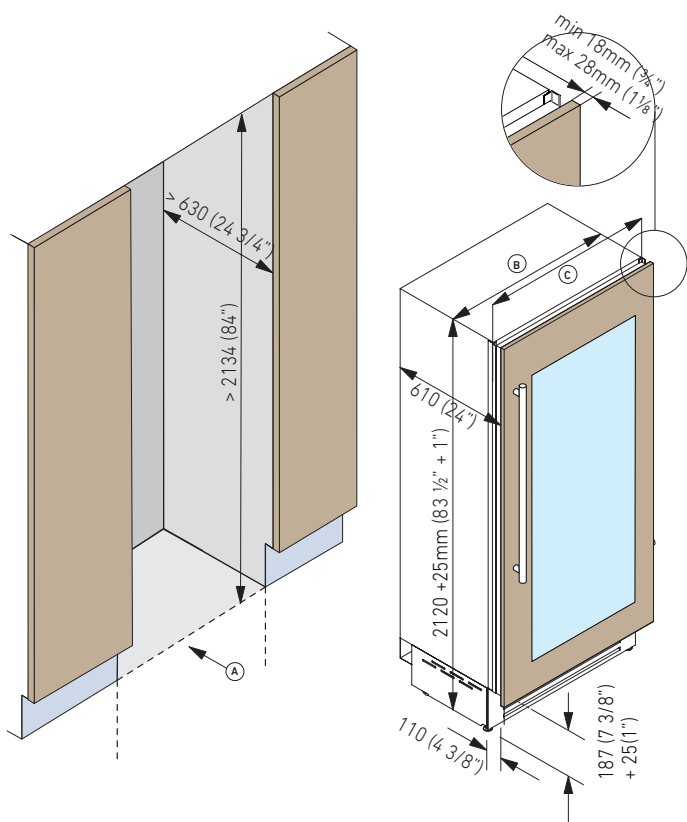

FRONT VIEW

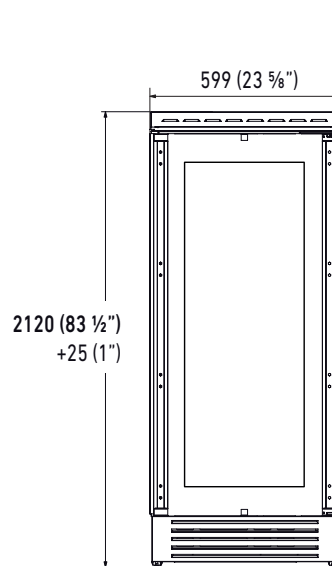


SIDE VIEW

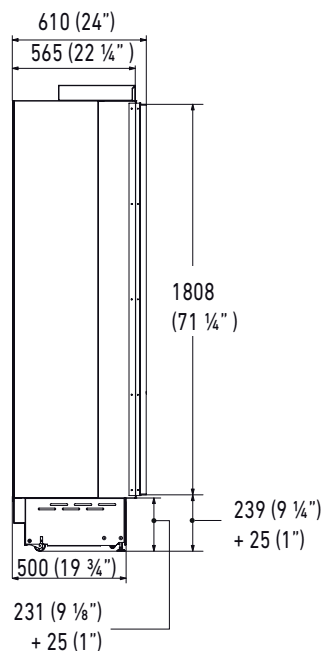


| TECHNICAL DATA                        |     |
|---------------------------------------|-----|
| Niche Width A (mm)                    | 600 |
| Unit Width B (mm)                     | 587 |
| Unit Width with lateral frames C (mm) | 599 |


TOP VIEW,  
HINGE 105°

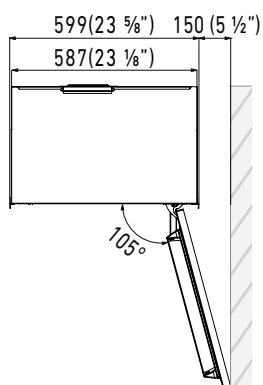

TOP VIEW,  
HINGE 90°

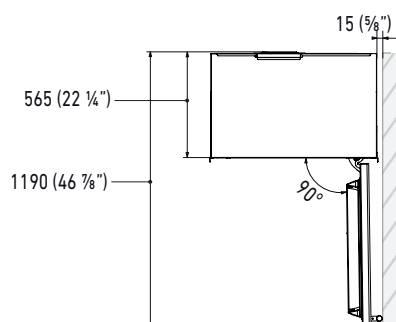

PLINTH SIZE

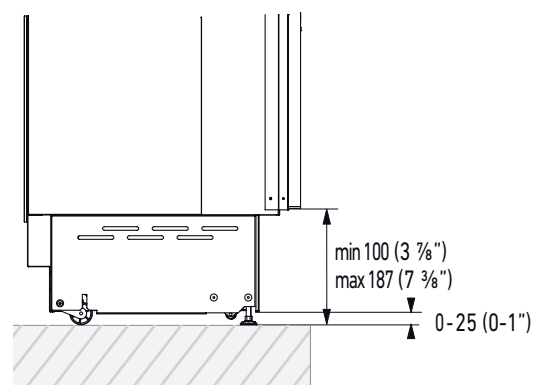

**i** For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

**i** Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.


S600FW3

60 cm, WINE CELLAR, OFW Model

BUILT-IN

INTEGRATED® SERIES

CUSTOM PANELS INFORMATION

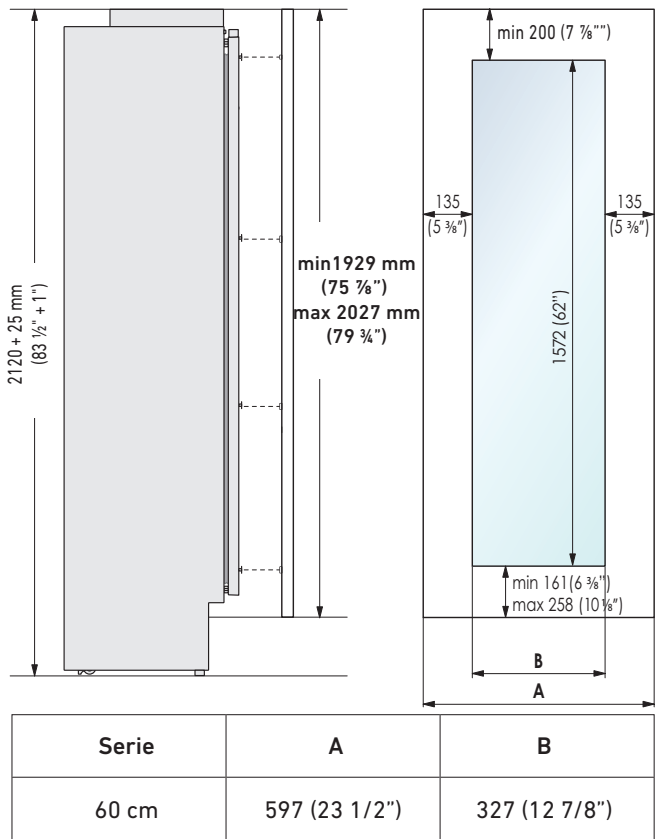

INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 18 mm and 28 mm

|                          |       |
|--------------------------|-------|
| Door Panels Weight Max   | 34 kg |
| Drawer Panels Weight Max | kg    |



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

# S600FW3


60 cm, WINE CELLAR, OFW Model

BUILT-IN

INTEGRATED® SERIES


## PRODUCT SPECIFICATIONS AND DIMENSIONS

Electrical Connection

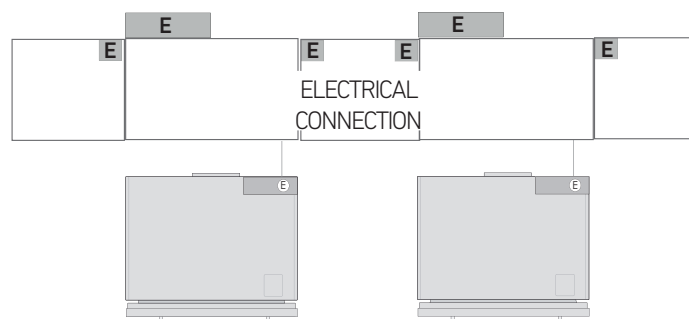

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

**IMPORTANT:** do not put the water shut-off valve behind the appliance where it will be inaccessible.

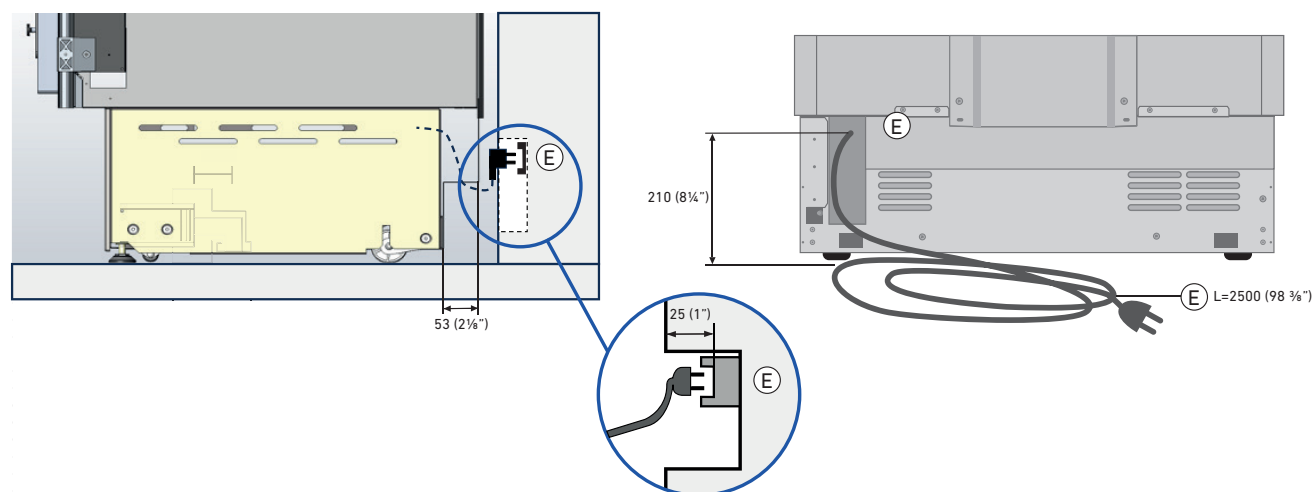

For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.