

S750FW6

75 cm, WINE CELLAR, 0FW Model

BUILT-IN

INTEGRATED® SERIES

Fhiaba



FEATURES

- Made in Italy: Designed and built entirely in Italy with artisanal precision
- Long Term Reliability: Premium materials and rigorous testing ensure consistent, durable performance
- Galvanized Steel Structure: Strength and stability engineered to last
- Antibacterial Interior: Hygienic surfaces preserving freshness and bottle quality
- ProVent™: Uniform cold air distribution across every zone
- EquiLance™: Patented variable pivot hinge for silent, stable movement
- OptiView™: Diffused and uniform LED lighting, elegant and with low heat emission to preserve the wine's properties
- Full Color TFT Display: Clear, intuitive, high definition interface
- Active Safety: Visual and acoustic alerts
- 100% Total No Frost: Automatic system that prevents ice formation and ensures impeccable humidity control
- Variable Speed Compressors: Precise temperature control and reduced vibrations
- Sabbath Mode: Dedicated function for observance needs
- Easy Installation: Adjustable feet and rear wheels
- Two Independent Climate Zones: Dedicated temperature and humidity control for red, white, and sparkling wines
- Triple-layer bronzed glass door: Total protection against UV rays and external temperature fluctuations
- Humidity control: Precise regulation to preserve corks, labels, and bottle integrity

GENERAL PROPERTIES

Equilance Hinge	YES
Soft-Closing Glides	NO
Low Vibration	YES
OptiView (Led Light Spots)	YES
Shelves	13
Type Of Shelves	WOOD
Door Bins	
Fridge Interior Drawers	
Freezer Drawers	N/A
Evenlift Shelves	NO
Full Extension Shelves 90° Door Opening	YES
Full Extension Drawers 90° Door Opening	NO
Defrost Process	AUTOMATIC
Ice Maker With Water Filter	NO
Door Open Alarms	YES
Shopping Fridge	NO
Shopping Freezer	NO
Power Failure Alert	YES
Water Dispenser With Water Filter	NO




S750FW6

75 cm, WINE CELLAR, OFW Model

BUILT-IN

INTEGRATED® SERIES

PRODUCT DETAIL

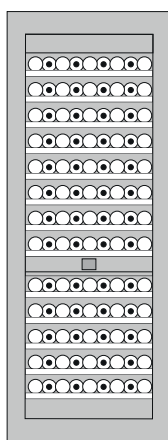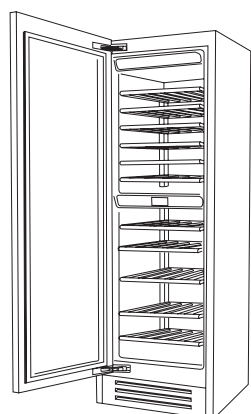

1D | 2M

wine cellar

D = door

M = separate microclimates

CAPACITY	
Volume Compartment 1 (L)	467
Volume Compartment 2 (L)	N/A
Volume Compartment 3 (L)	N/A
Total Net Volume (L)	467
Total Gross Volume (L)	482
Compartment 1 / Upper wine cellar capacity (bottles)	N/A
Compartment 2 / Lower wine cellar capacity (bottles)	N/A
Compartment 3 / Bottom wine cellar capacity (bottles)	N/A

TECHNICAL DETAILS	
Total absorbed current (A)	1.5
Voltage (V)	220-240V
Frequency (Hz)	50/60 Hz
Power Cord Length (mm)	2
Plug Type	Tipo F (Schuko) 16A IEC13 10A
Climatic class	SN/T
Noise level (dB)	41
Refrigerant (gas)	R600a
Water connection / female attachment	/

EFFICIENCY	
New Energy Label class	G
Energy consumption (kWh/year)	189

DIMENSIONS & WEIGHT	
Height of the product (closed weels)(mm)	2120
Adjustable feet height (mm)	25
Width of the product (mm)	749
Depth of Product without handle (mm)	610
Wall cavity height (mm)	2134
Wall cavity width (mm)	750
Wall cavity depth (mm)	650
Net Weight (kg)	153
Gross Weight (kg)	174

TEMPERATURE RANGES	
Climatic compartments	2
Compartment 1 / Upper temperature (°C)	from 4 to 18
Compartment 2 / Middle temperature (°C)	from N/A to N/A
Low temp zone	NO
Compartment 3 / Low temperature (°C)	from 4 to 18
Dual zone	NO

ACCESSORIES	
• Stainless steel sides panels	• Front ventilation kit
• Glass door	• 90° Door stop
• Joining kit	• Wine kit
• Stainless steel tubular handles Ø30mm	• Cheese drawer
• Stainless steel tubular handles Ø18mm	• Set of knives
• Stainless steel panels	• Prosciutteria kit
• Stainless steel portal for freestanding	• Bottle trap
• Extra length anti-tipping kit	• Cigar drawer
• Anti-condensation kit	• Beverage drawer
• Cleaning kit	• Beverage shelf
• Active carbon filter	• Beverage removable shelf
• FLD - Fhiaba Link Device	

S750FW6


75 cm, WINE CELLAR, OFW Model

BUILT-IN


INTEGRATED® SERIES

PRODUCT SPECIFICATIONS AND DIMENSIONS


Fhiaba

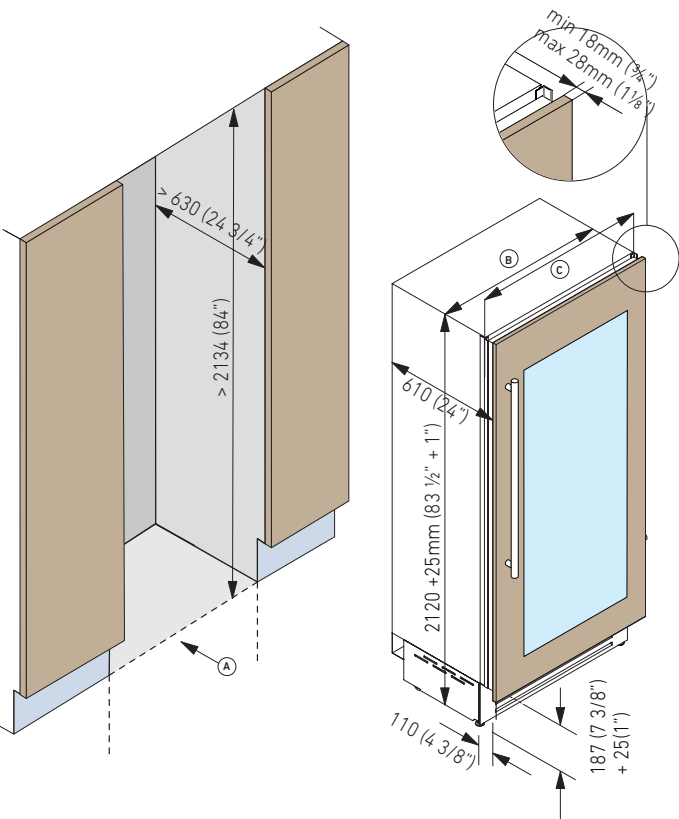

FRONT VIEW

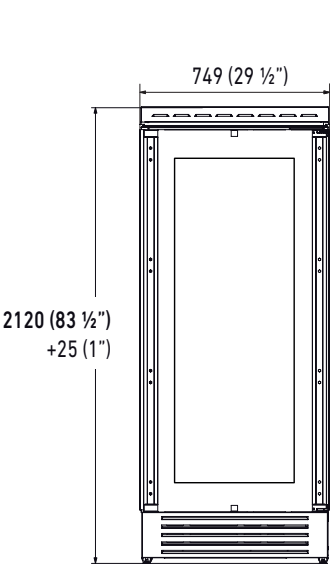


SIDE VIEW

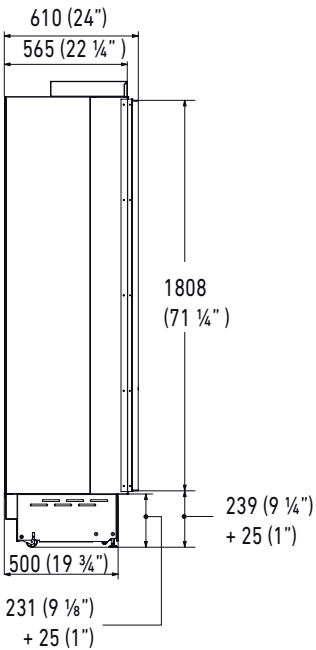


TECHNICAL DATA	
Niche Width A (mm)	750
Unit Width B (mm)	737
Unit Width with lateral frames C (mm)	749


TOP VIEW,
HINGE 105°

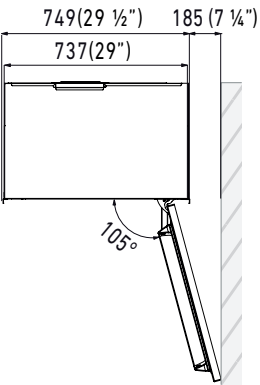

TOP VIEW,
HINGE 90°

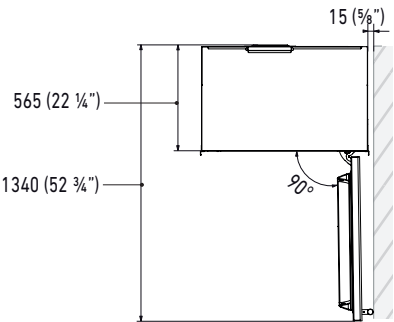

PLINTH SIZE

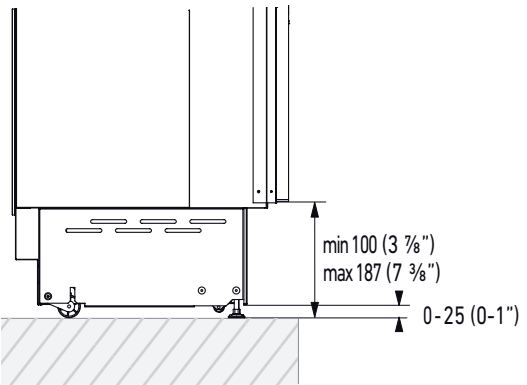

i For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

i Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.


S750FW6

75 cm, WINE CELLAR, OFW Model

BUILT-IN

INTEGRATED® SERIES

CUSTOM PANELS INFORMATION

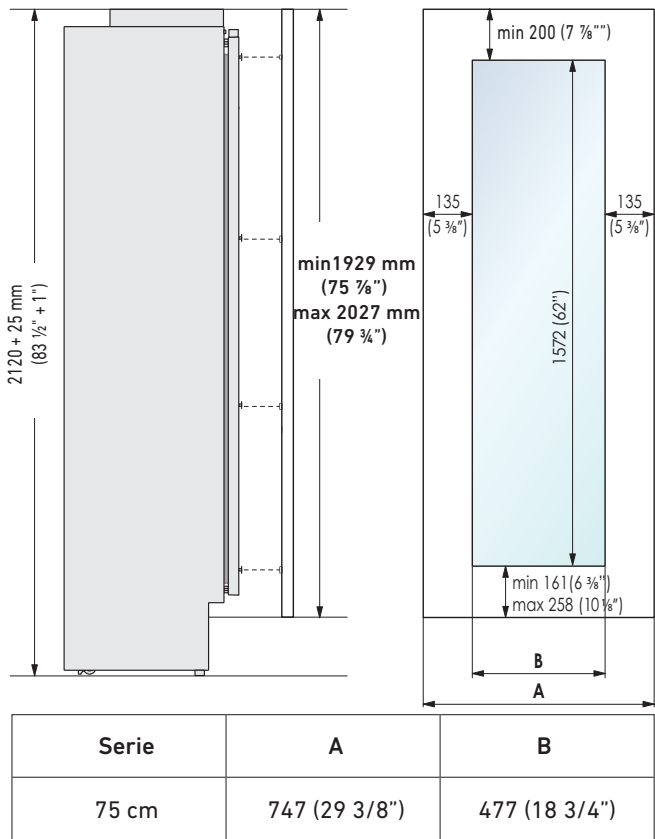

INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 18 mm and 28 mm

Door Panels Weight Max	34 kg
Drawer Panels Weight Max	kg



For installation specifications, please consult with Fhiaba.
For optimum installation, we recommend using the actual product as the best guide.

S750FW6


75 cm, WINE CELLAR, OFW Model

BUILT-IN

INTEGRATED® SERIES


PRODUCT SPECIFICATIONS AND DIMENSIONS

Electrical Connection

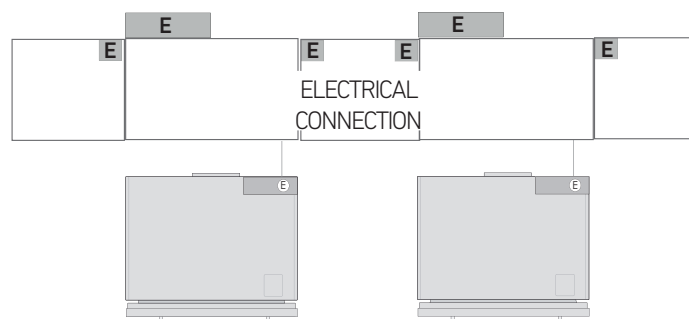

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

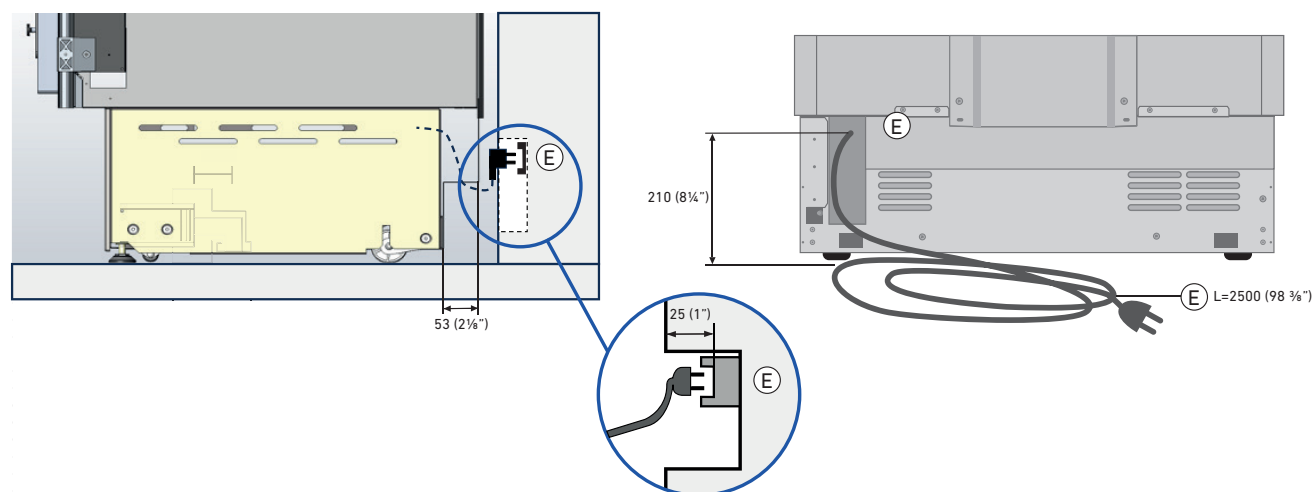

For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.