

S750TWT3

75 cm, WINE CELLAR, OT Model

BUILT-IN

INTEGRATED® SERIES

Fhiaba



FEATURES

- Made in Italy: Designed and built entirely in Italy with artisanal precision
- Long Term Reliability: Premium materials and rigorous testing ensure consistent, durable performance
- Galvanized Steel Structure: Strength and stability engineered to last
- Antibacterial Interior: Hygienic surfaces preserving freshness and bottle quality

GENERAL PROPERTIES

|                                         |           |
|-----------------------------------------|-----------|
| Equilance Hinge                         | YES       |
| Soft-Closing Glides                     | NO        |
| Low Vibration                           | YES       |
| OptiView (Led Light Spots)              | YES       |
| Shelves                                 | 3         |
| Type Of Shelves                         | WOOD      |
| Door Bins                               |           |
| Fridge Interior Drawers                 |           |
| Freezer Drawers                         | 1         |
| Evenlift Shelves                        | NO        |
| Full Extension Shelves 90° Door Opening | YES       |
| Full Extension Drawers 90° Door Opening | NO        |
| Defrost Process                         | AUTOMATIC |
| Ice Maker With Water Filter             | NO        |
| Door Open Alarms                        | YES       |
| Shopping Fridge                         | NO        |
| Shopping Freezer                        | NO        |
| Power Failure Alert                     | YES       |
| Water Dispenser With Water Filter       | NO        |

# S750TWT3


## 75 cm, WINE CELLAR, OT Model

### BUILT-IN

#### INTEGRATED® SERIES

### PRODUCT DETAIL

# Fhiaba

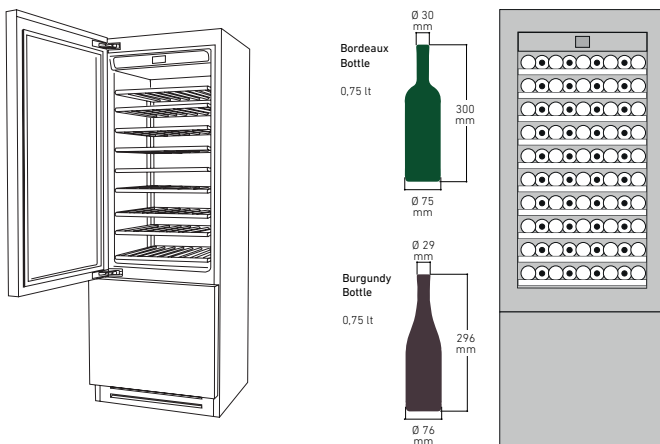

1D | 1BD | 2M

**D** = door  
**BD** = drawer  
**M** = separate microclimates

| CAPACITY                                              |     |
|-------------------------------------------------------|-----|
| Volume Compartment 1 (L)                              | 320 |
| Volume Compartment 2 (L)                              | N/A |
| Volume Compartment 3 (L)                              | 105 |
| Total Net Volume (L)                                  | 425 |
| Total Gross Volume (L)                                | 439 |
| Compartment 1 / Upper wine cellar capacity (bottles)  | 81  |
| Compartment 2 / Lower wine cellar capacity (bottles)  | N/A |
| Compartment 3 / Bottom wine cellar capacity (bottles) | N/A |

| TECHNICAL DETAILS                    |                               |
|--------------------------------------|-------------------------------|
| Total absorbed current (A)           | 2                             |
| Voltage (V)                          | 220-240V                      |
| Frequency (Hz)                       | 50/60 Hz                      |
| Power Cord Length (mm)               | 2                             |
| Plug Type                            | Tipo F (Schuko) 16A IEC13 10A |
| Climatic class                       | SN/T                          |
| Noise level (dB)                     | 41                            |
| Refrigerant (gas)                    | R600a                         |
| Water connection / female attachment | /                             |

| EFFICIENCY                    |     |
|-------------------------------|-----|
| New Energy Label class        | G   |
| Energy consumption (kWh/year) | 172 |

| DIMENSIONS & WEIGHT                      |      |
|------------------------------------------|------|
| Height of the product (closed weels)(mm) | 2120 |
| Adjustable feet height (mm)              | 25   |
| Width of the product (mm)                | 749  |
| Depth of Product without handle (mm)     | 610  |
| Wall cavity height (mm)                  | 2134 |
| Wall cavity width (mm)                   | 750  |
| Wall cavity depth (mm)                   | 650  |
| Net Weight (kg)                          | 169  |
| Gross Weight (kg)                        | 190  |

| TEMPERATURE RANGES                      |                 |
|-----------------------------------------|-----------------|
| Climatic compartments                   | 2               |
| Compartment 1 / Upper temperature (°C)  | from 4 to 18    |
| Compartment 2 / Middle temperature (°C) | from N/A to N/A |
| Low temp zone                           | NO              |
| Compartment 3 / Low temperature (°C)    | from 4 to 18    |
| Dual zone                               | YES             |

| ACCESSORIES                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Stainless steel sides panels</li> <li>Glass door</li> <li>Joining kit</li> <li>Stainless steel tubular handles Ø30mm</li> <li>Stainless steel tubular handles Ø18mm</li> <li>Stainless steel panels</li> <li>Stainless steel portal for freestanding</li> <li>Extra length anti-tipping kit</li> <li>Anti-condensation kit</li> <li>Cleaning kit</li> <li>Active carbon filter</li> <li>FLD - Fhiaba Link Device</li> </ul> | <ul style="list-style-type: none"> <li>Front ventilation kit</li> <li>90° Door stop</li> <li>Wine kit</li> <li>Cheese drawer</li> <li>Set of knives</li> <li>Prosciutteria kit</li> <li>Bottle trap</li> <li>Cigar drawer</li> <li>Beverage drawer</li> <li>Beverage shelf</li> <li>Beverage removable shelf</li> </ul> |

S750TWT3


75 cm, WINE CELLAR, OT Model

BUILT-IN

INTEGRATED® SERIES


PRODUCT SPECIFICATIONS AND DIMENSIONS

Fhiaba

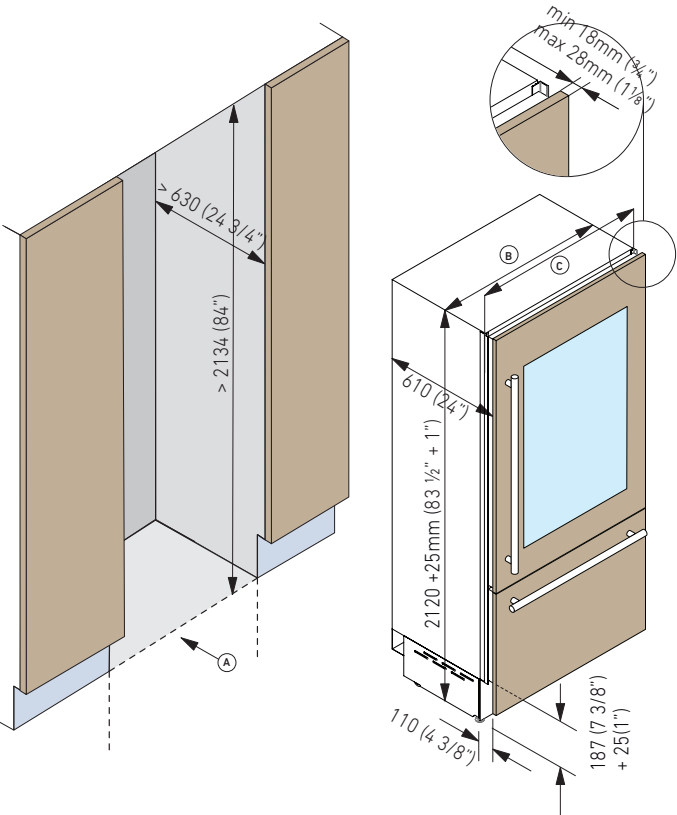


FRONT VIEW

SIDE VIEW

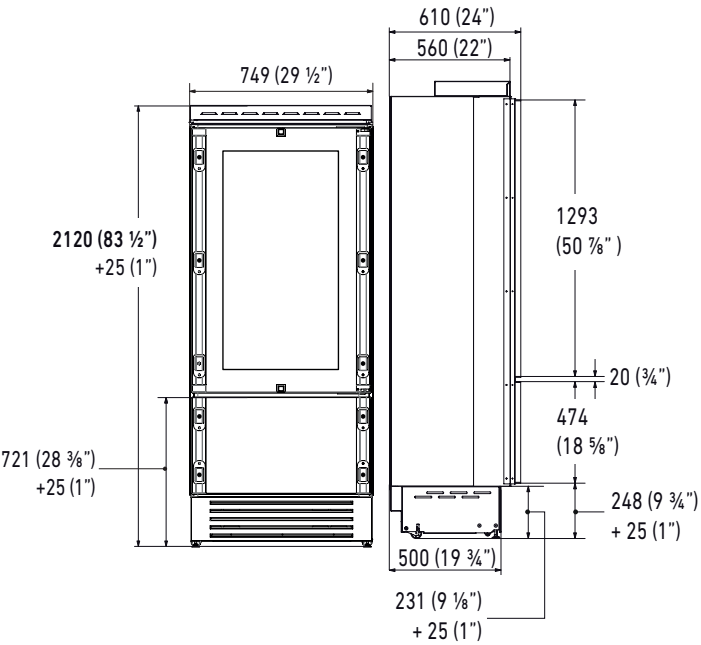


| TECHNICAL DATA                        |     |
|---------------------------------------|-----|
| Niche Width A (mm)                    | 750 |
| Unit Width B (mm)                     | 737 |
| Unit Width with lateral frames C (mm) | 749 |


TOP VIEW,  
HINGE 105°

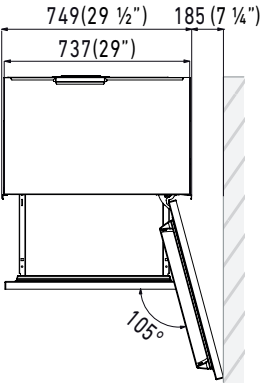

TOP VIEW,  
HINGE 90°

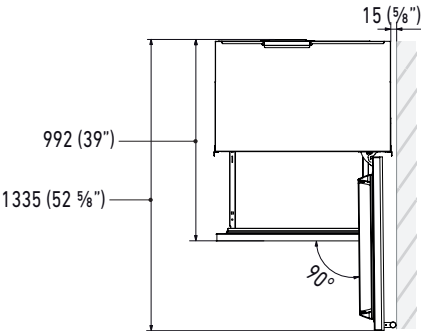

PLINTH SIZE

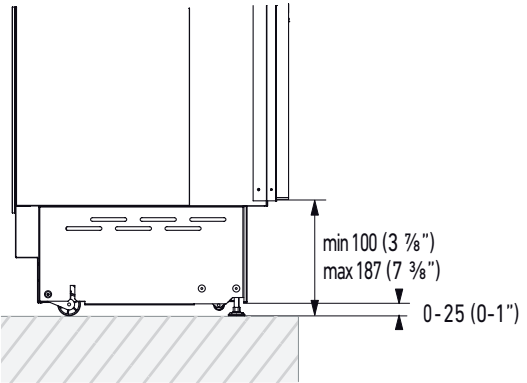

**i** For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

**i** Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.


S750TWT3

75 cm, WINE CELLAR, OT Model

BUILT-IN

INTEGRATED® SERIES

CUSTOM PANELS INFORMATION

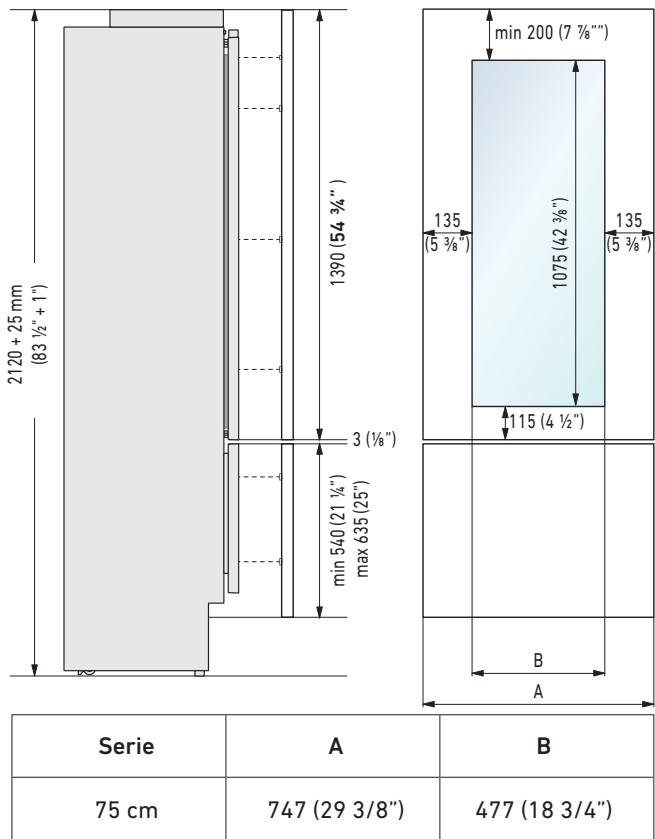

INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 18 mm and 28 mm

|                          |       |
|--------------------------|-------|
| Door Panels Weight Max   | 23 kg |
| Drawer Panels Weight Max | 11 kg |



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

# S750TWT3


75 cm, WINE CELLAR, OT Model

BUILT-IN

INTEGRATED® SERIES


## PRODUCT SPECIFICATIONS AND DIMENSIONS

Electrical Connection

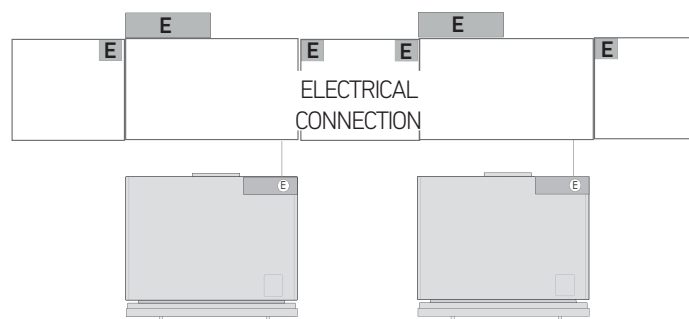

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

**IMPORTANT:** do not put the water shut-off valve behind the appliance where it will be inaccessible.

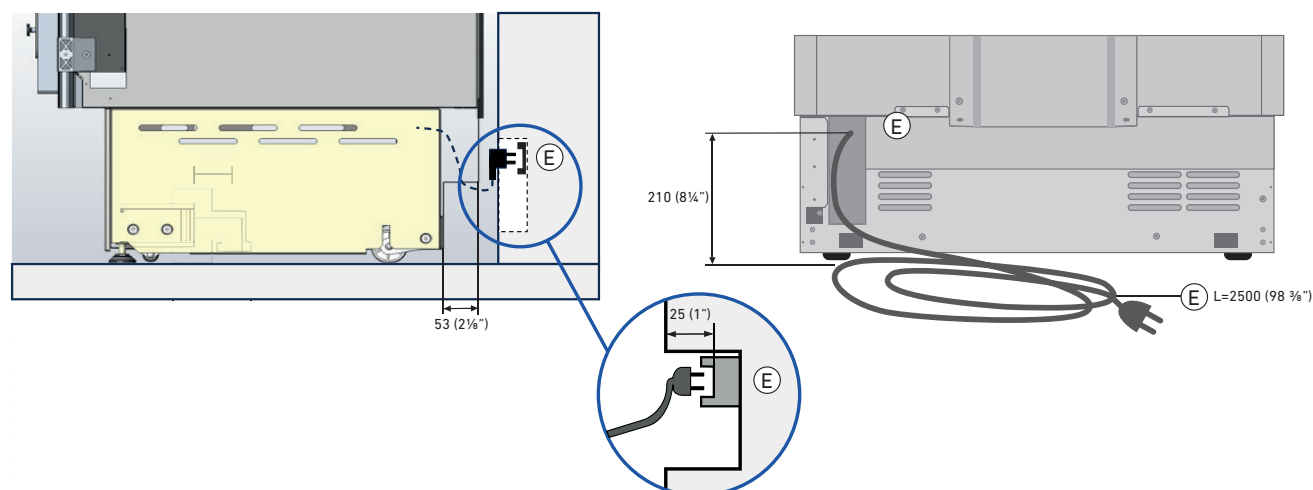

For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.